



Powersave Projects Ltd

EV Chargers - OCPP Management Platform

PS122PRO-W (SEVK122)

Wall/Floor Type

1 x 7Kw (1-Phase 32A 230V) or

1 x 22Kw (3-Phase 32A 415V)

5m or 7.5m Cable Length

WIFI/Ethernet/4G

5inch LCD Display

Dynamic Load Balancing

Build-in MID Certified meter

EN/IEC 61851-1: 2017

EN/IEC 61851-21-2: 2018

Plug: IEC 62196-2, Type 2

Overcurrent protection

Residual current protection

Ground protection

Over/Under voltage protection

Over/Under frequency protection

Over/Under temp protection

Temp: -25°C to +50°C

Humidity: Max.95% (non-condensation)

Dimen.: 340*285*147mm (H*W*D)

Weight: 11Kg


Warranty: 2 years

IP65 IK10 CE

AC model



Floor Type

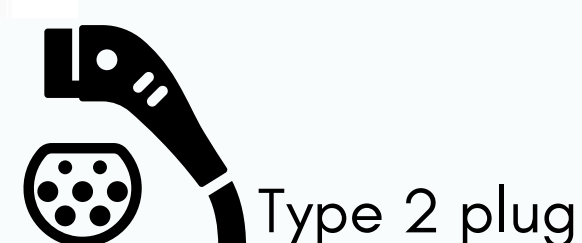

Type 2 plug

Contact us for DC models 60Kw-120Kw-180Kw-240Kw

